



4MM SPC STEPPER CATALOGUE 2021



**EI 401****EI 402****EI 403****EI 404**

**EI 405****EI 406****EI 407****EI 408**



SPECIFICATIONS

RIGID CORE: WOOD, SPC Tiles for light commercial and heavy commercial | PUR Polyurethane reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	DETAILS
TYPE OF FLOOR COVERING	ISO 10582	RIGID CORE SPC TILES
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Commercial : 31 Heavy Commercial : 34

TECHNICAL CHARACTERISTICS	STANDARDS	DETAILS
TOTAL THICKNESS	EN ISO 2436 (EN 428)	4.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.30 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	8000 g/m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	—	1220 mm x 182mm / 12 pcs per box 2.66sqmt per box

TECHNICAL PERFORMANCES	STANDARDS	DETAILS
Dimensional Stability	EN ISO 23999 (EN 434)	≤ 0.10%
Reaction To Fire	EN 13501 – 1	Bfl- S1 glued over A2fl substrate (concrete)
Residual Indentation	EN ISO 24343-1 (EN 433)	Required value : ≤ 0.10mm Average measured value : 0.03mm
FURNITURE LEG	EN 424	No damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2mm
THERMAL RESISTANCE	EN ISO 10456	0.07M2 K/W

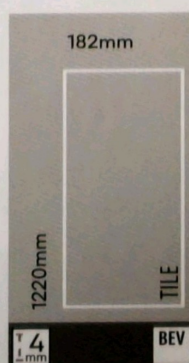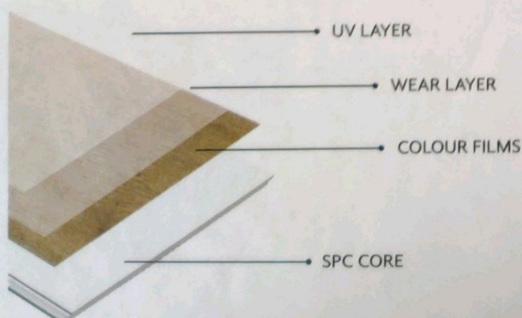

Mkt. By :